


REV	DATE	DESCRIPTION	INT.

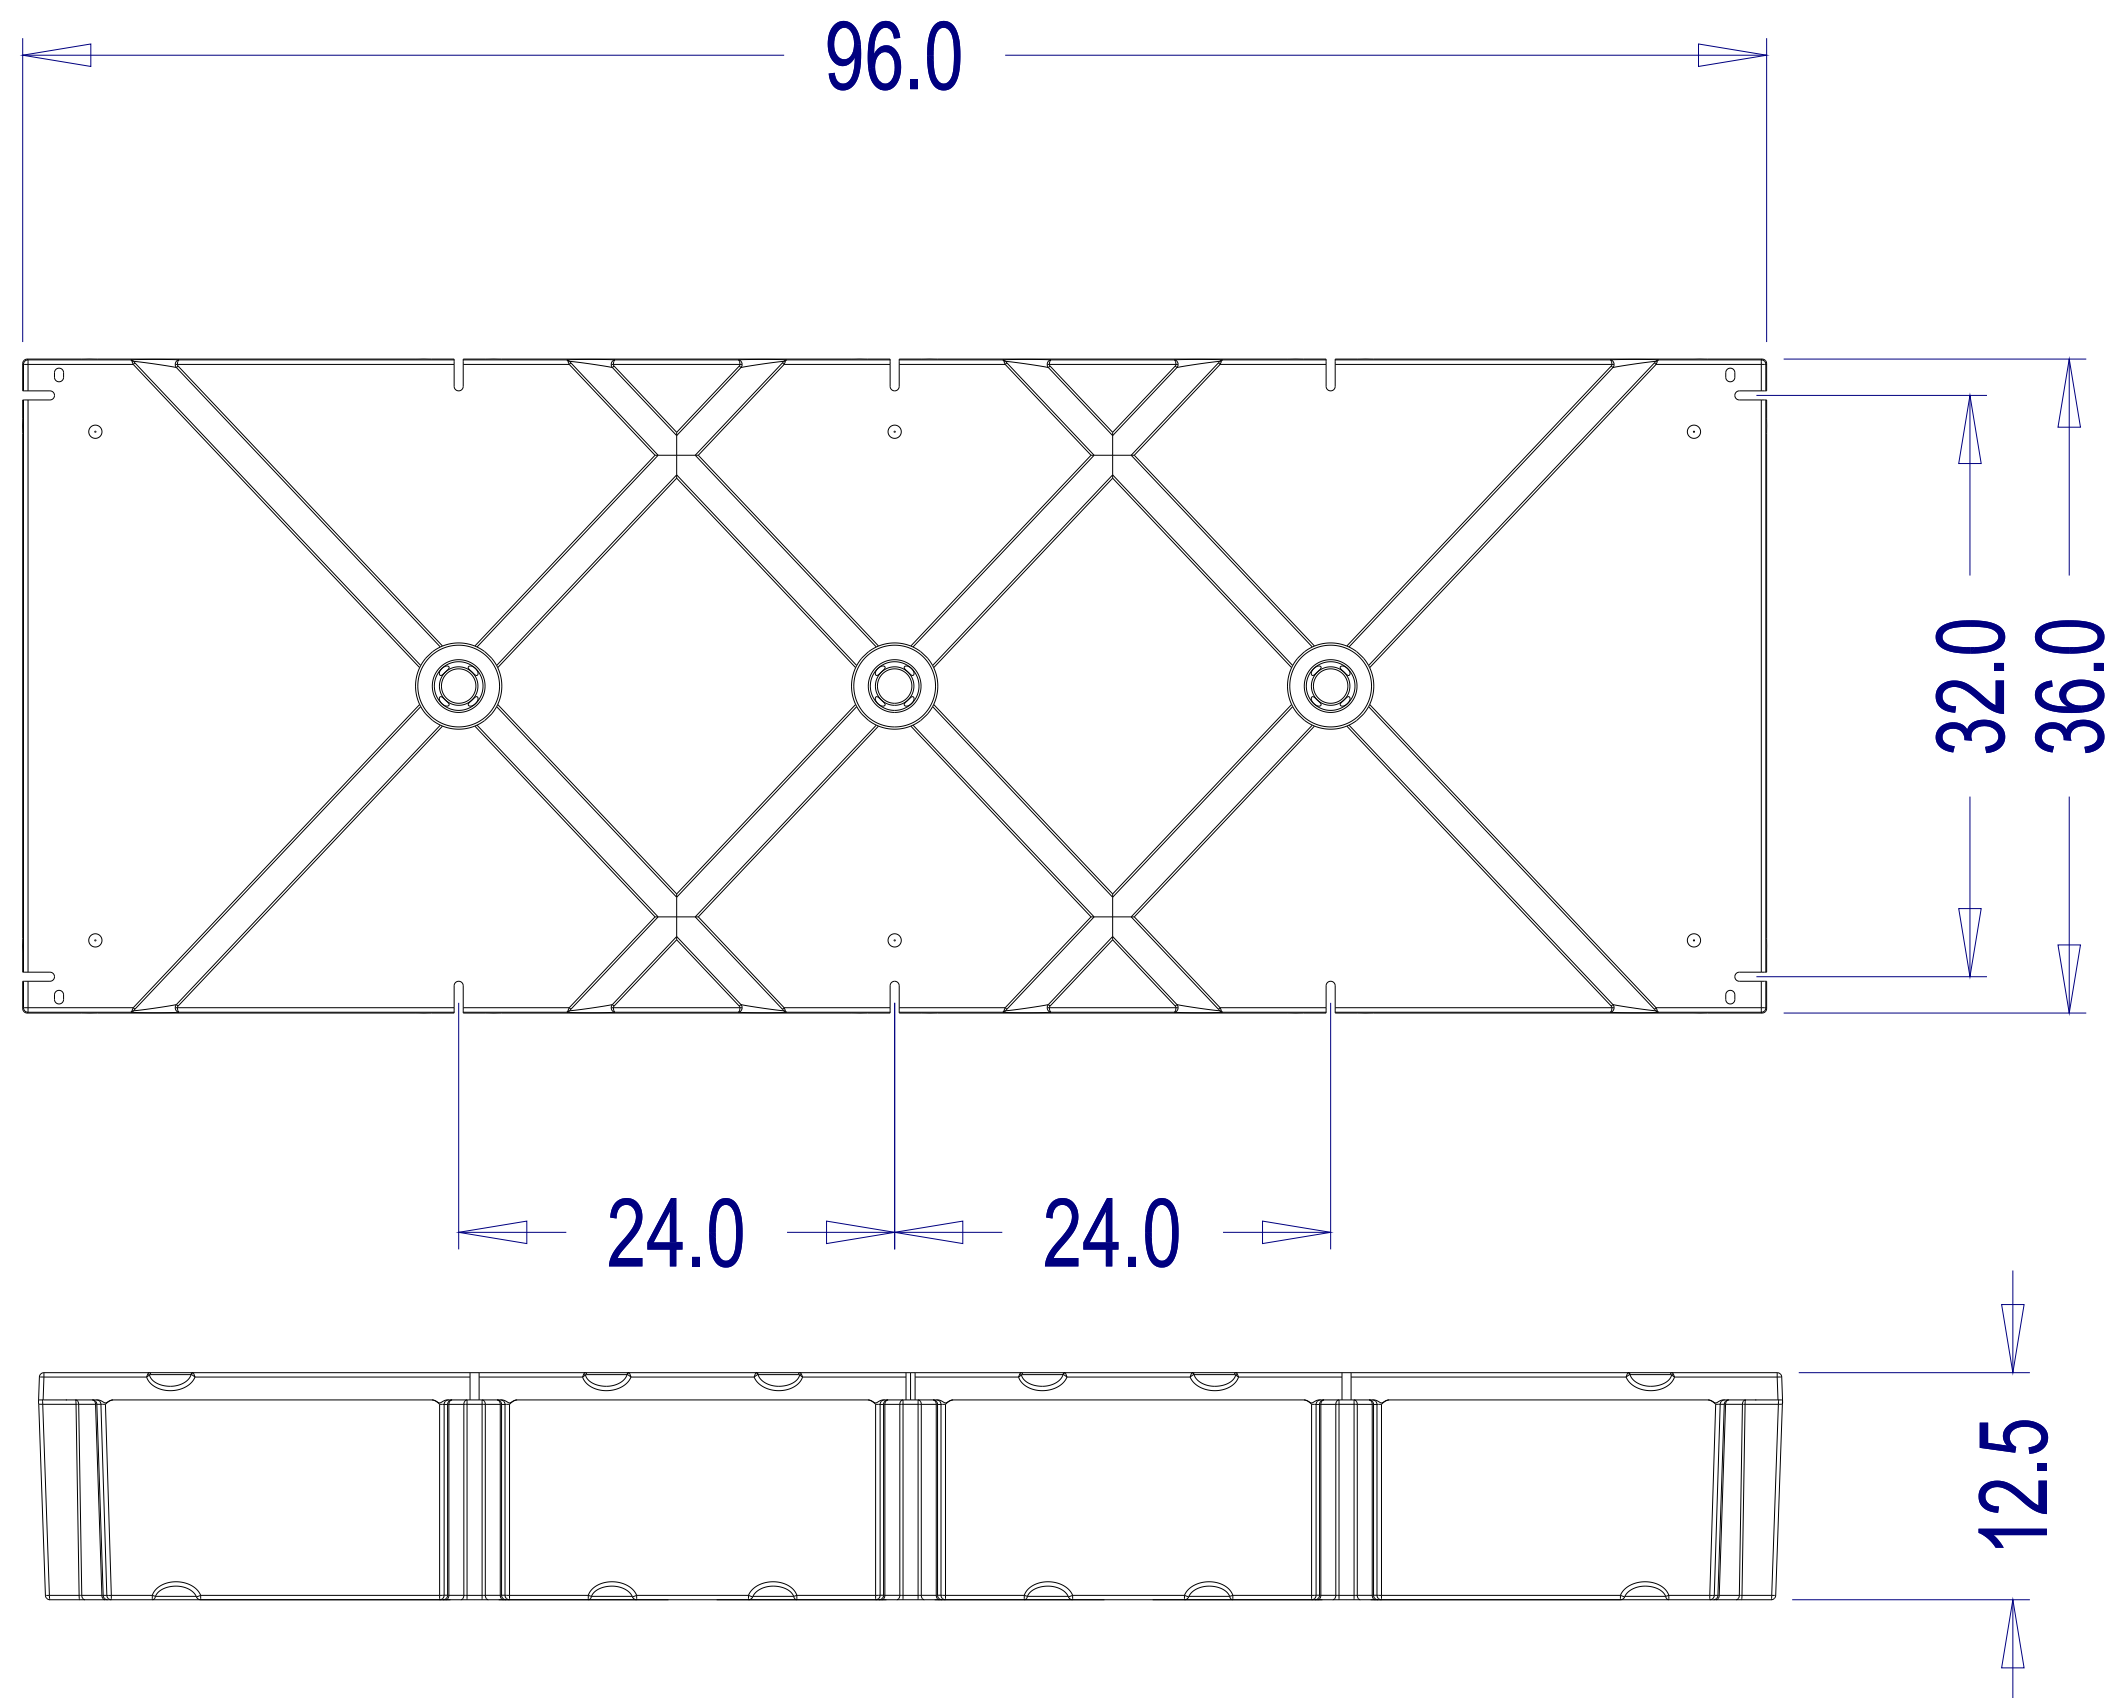


SEE SEPARATE DETAIL DRAWING FOR  
DETAILS OF CORNER SLOTS AND HOLES.

WEIGHTS AND BUOYANCY RATINGS BASED ON STANDARD  
0.15" NOMINAL WALL THICKNESS. THESE RATINGS WILL  
BE AFFECTED BY THE WALL THICKNESS ON SPECIAL ORDERS.


BUOYANCY RATINGS BASED ON FINITE ELEMENT ANALYSIS  
AND CONFIRMED BY TANK TESTING.  
ALL BUOYANCY RATINGS +0 /-5%

ALL DIMENSIONS SUBJECT TO NORMAL MANUFACTURING  
TOLERANCES

**NOMINAL BUOYANCY 1414 IBS IN FRESHWATER**

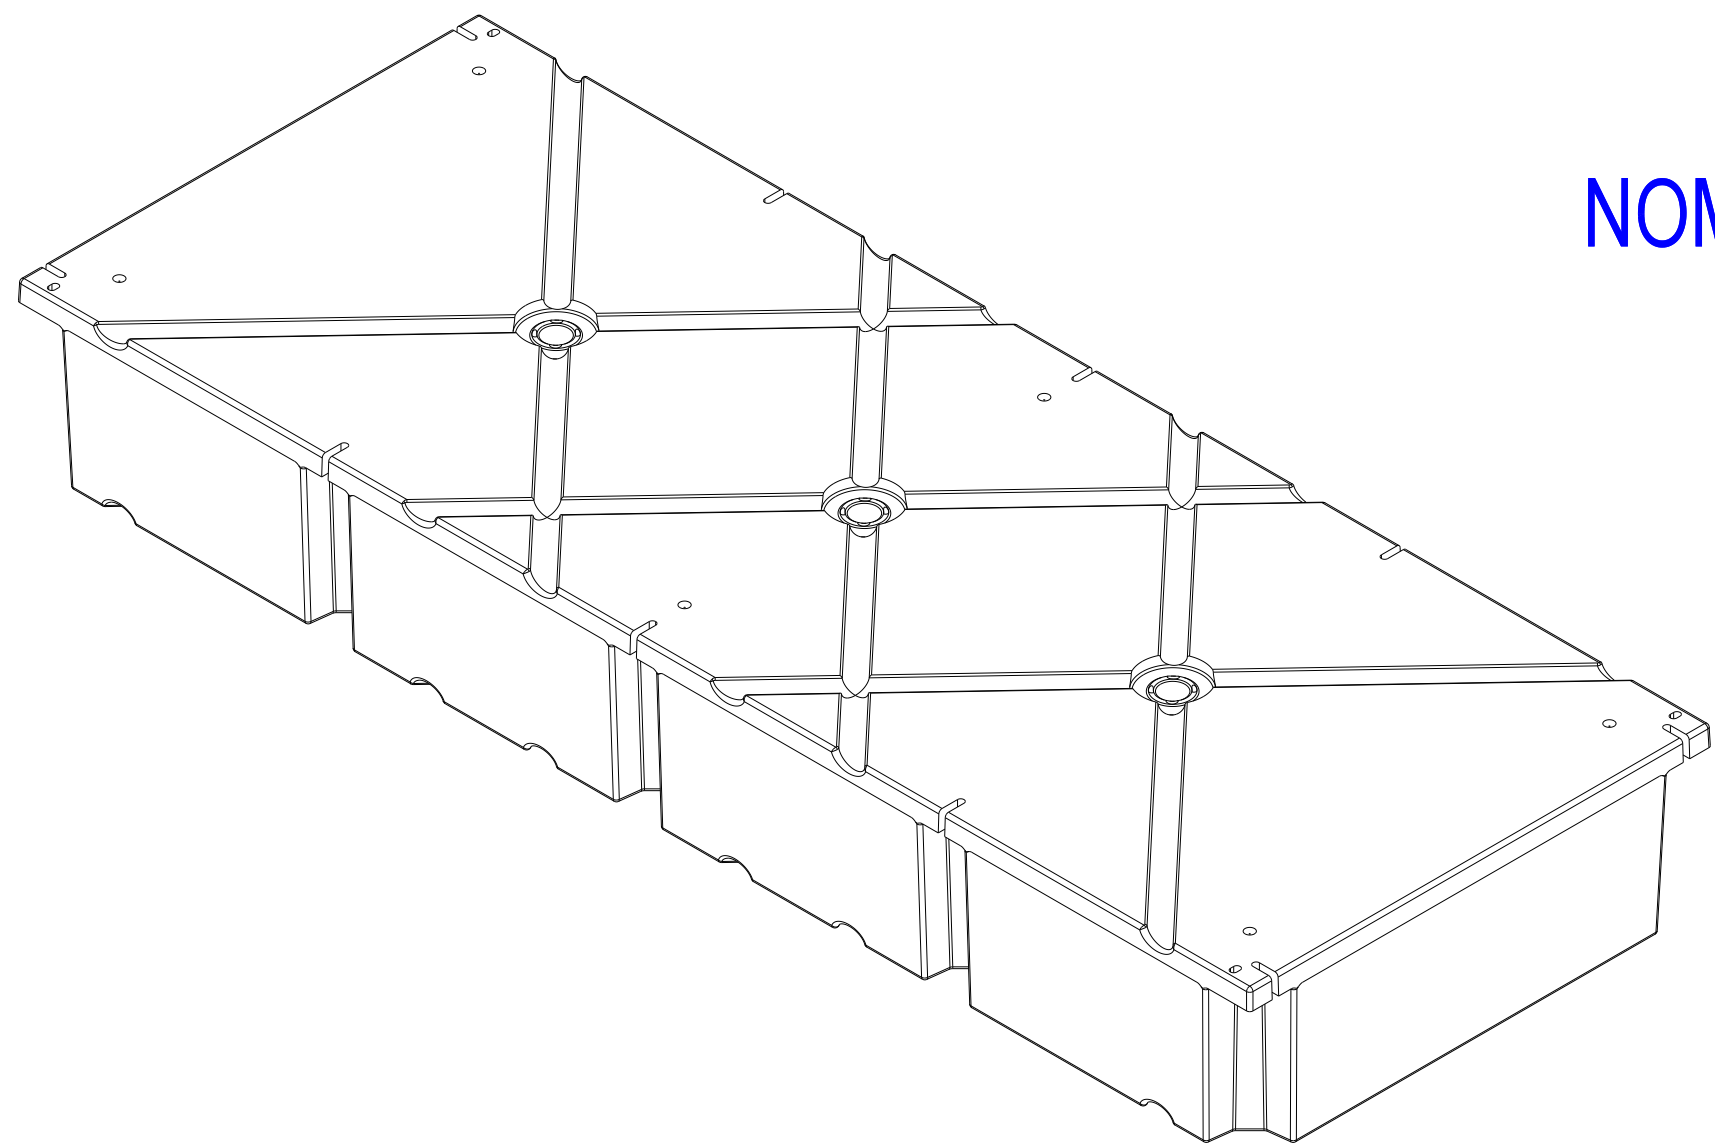

**permafloat®**  
DOCK FLOTATION



MATL	LLDPE	GRADE	VIRGIN	COLOR	BLACK
DATE	7/11/2008	TITLE	PERMAFLOAT DOCK FLOAT		
DRAWN	MHA	DRG. NO.	PF2008/ 3 8 12	PAGE	1 OF 1